


# Woodoc 45 Specification Sheet

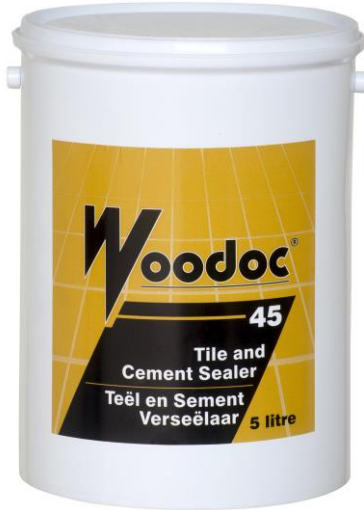

## Typical Application:

For interior/exterior use on unglazed porous substrates like unsealed tiles, cement, stone and brick. It gives a clear, gloss finish.

## Product Features:

- Strong, durable surface finish.
- Water-repellent.
- Stain- and oil resistant.
- Easy to use.
- Easy to clean brushes and equipment with water.
- Environment-friendly.
- Complete how-to-use instructions on label.

**No:** WD 45/004

**Dated:** 11/04/17

**Name:** Woodoc 45 – Tile and Cement Sealer

**Description:** Water-based tile and cement sealer for unglazed porous substrates.

**Coverage:** 5 – 12 m<sup>2</sup> per litre, depending on porosity of substrate.

**Application:** With paint brush. Clean brushes with water immediately after use.

**Dilution:** Not recommended

**Drying Time:** 2 – 4 hours. Allow 24 hours before surfaced is used.

**Product Properties:** Clear, water-based tile and cement sealer.

**Wax Content:** None

**Compatibility:** Water

**Packaging:** 1 litre, 5 litre. (20 litres available on request from dealer)



Manufactured and marketed by:  
Rekara Mills (Pty) Ltd  
PO Box 16, Fort Beaufort 5720, South Africa  
Tel +2746 645 1109 Fax +2746 645 1538

Customer Service:

Toll free during office hours 0800 411 200 (South Africa only)

Email: [information@woodoc.com](mailto:information@woodoc.com) or visit [www.woodoc.com](http://www.woodoc.com)

Copyright © Woodoc 2005. All Rights Reserved.